



Hewlett Packard Cartridges

[CLICK HERE TO GO THE INDEX](#)

932, 933, 950, 951


Method A

1. Locate the “Fill Port” on your cartridge.
2. You should see a plastic ball in this “Fill Port”. Use a allen wrench, or a small screw driver with a hammer, to gently knock the plastic ball into the cartridge.
3. Connect the needle to the syringe and fill with ink.
4. Inject about 10-15 ml. of ink into the filling hole or until the ink chamber is full. Be sure to leave enough room in the ink chamber for the new plug, it will create pressure when inserted.
5. Seal the hole. Make sure the seal is air tight. If your plug is sticking out to much, cut it down to size and use electrical or duct tape to help secure the plug in place.
6. Rinse the syringe with water and dry for future use, or use with a different color ink.
7. Reinsert the cartridge and run a priming cycle as per printer instructions.



1. Locate the “Nozzle” on your cartridge.
2. Connect the cannula needle to the syringe and fill with ink.
3. Inject about 10-15 ml. of ink into the cartridge or until the ink chamber is full. If you feel a little pressure, pull back on the syringe handle to pull some air out, and then continue filling (repeat this process as needed).
4. Once finished, pull back on the syringe handle a little while its still in the nozzle, to help prime the cartridge and get it ready to use.
5. Remove the syringe from the cartridge, rinse it with water and dry for future use, or use with a different color ink.
6. Reinsert the cartridge and run a priming cycle as per printer instructions.

Method A

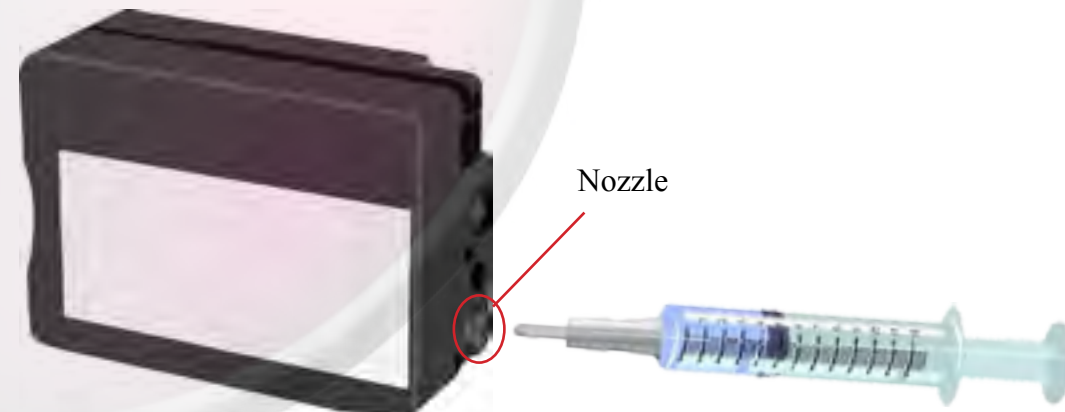

Note: You may want to refer to your printer manual to turn off usage information. This allows you to continue using your newly refilled cartridge.